

产品数据表单

B-P0200R




· 轮架:

采用钢压制成型。螺栓轮轴。镀锌，蓝色钝化，不含六价铬。

· 单轮:

· 轮胎/胎面: 采用优质耐冲击尼龙6。

· 轮辋/轮体: -

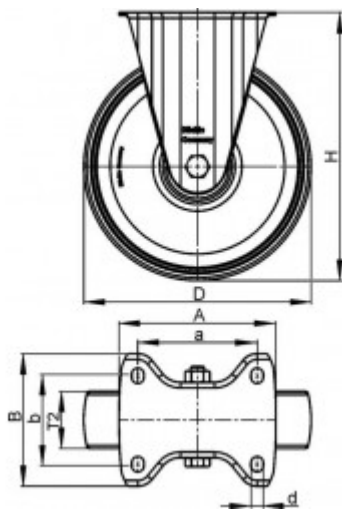

Technical data

单件重量	1.6 kg
总高度 (H)	235 mm
承载能力	300.00 kg
轮宽 (T2)	50 mm
轮径 (D)	200 mm
最低耐温性	-25° C - +80° C
最高耐温性	80° C
胎面及轮胎硬度	70 Shore D
轴承种类	滚柱轴承
顶板尺寸 (A, B)	140 x 110 mm
螺栓孔径 (d)	11 mm
螺栓孔间距 (a, b)	105 x 75-80 mm
制造商	Blickle

滚动阻力	■■■■■
行走噪音	■■■■■
保护地面	■■■■■

变量

☐		导电型, 无痕 - (ELS)
☐		-FA
☐		脚档 (FG)
☐		脚档 FS
☐		轴承 -XR