


产品数据表单

B-PPN 150R

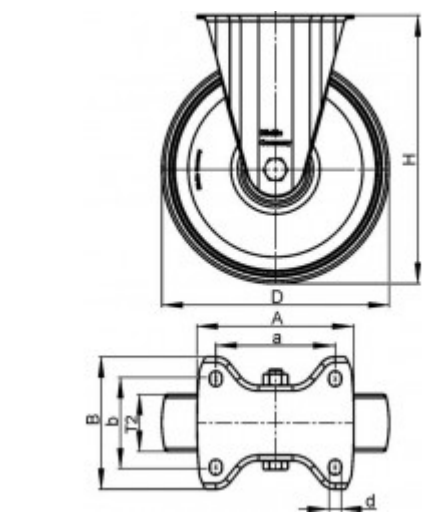

· 轮架:

采用钢压制成型。螺栓轮轴。镀锌，蓝色钝化，不含六价铬。

· 单轮:

· 轮胎/胎面:

采用优质耐冲击聚丙烯，滚动阻力和旋转阻力小。

· 轮辋/轮体:-

Technical data

单件重量	1.188 kg
总高度 (H)	190 mm
承载能力	300.00 kg
轮宽 (T2)	50 mm
轮径 (D)	150 mm
最低耐温性	-25° C - +80° C
最高耐温性	60° C
胎面及轮胎硬度	70 Shore D
轴承种类	滚柱轴承
顶板尺寸 (A, B)	140 x 110 mm
螺栓孔径 (d)	11 mm
螺栓孔间距 (a, b)	105 x 75-80 mm
制造商	Blickle

滚动阻力	■ ■ ■ ■ ■
行走噪音	■ ■ ■ ■ ■
保护地面	■ ■ ■ ■ ■

变量

☐		导电型 - (EL)
☐		-FA
☐		脚档 (FG)
☐		脚档 (FS)
☐		脚档 FS
☐		轴承 - (XR)