

产品数据表单

LKPXA-VPA 101G-FI



· **轮胎/胎面:**


采用优质实心橡胶，操作舒适性极高，行走噪音低，非常保护地面。

· **轮辋/轮体:** 采用优质耐冲击尼龙6。冲压轮胎。

· **类型:**

Technical data

单件重量	0.739 kg
万向脚轮偏心距 (F)	40 mm
总高度 (H)	136 mm
承载能力	110.00 kg
轮宽 (T2)	32 mm
轮径 (D)	100 mm
最低耐温性	-20° C - +60° C ° C
最高耐温性	60° C
胎面及轮胎硬度	80 Shore A
轴承种类	滑动轴承
顶板尺寸 (A, B)	90 x 66 mm
螺栓孔径 (d)	8.5 mm
螺栓孔间距 (a, b)	75 x 45/61 x 51 mm
制造商	Blickle

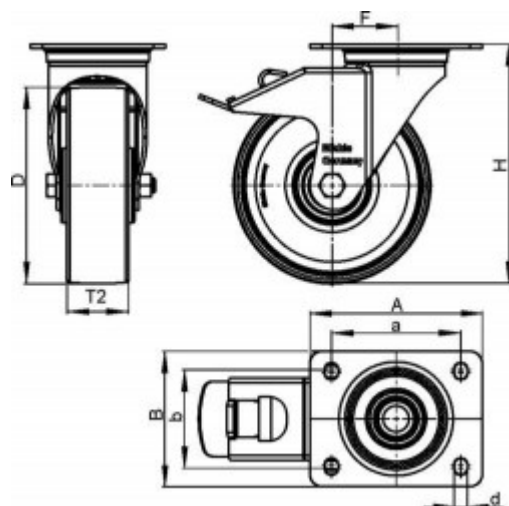

滚动阻力	■ ■ ■ ■ ■
行走噪音	■ ■ ■ ■ ■
保护地面	■ ■ ■ ■ ■

变量

☒		制动器 -FI
☐		-EXV02
☐		-EXV03
☐		-EXV04
☐		-EXV05
☐		-EXV07
☐		-EXV12
☐		-EXV13
☐		-EXV14
☐		-EXV15
☐		-EXV17