


P0 127/20K



- 轮胎/胎面: 采用优质耐冲击尼龙6。
- 轮辋/轮体: -

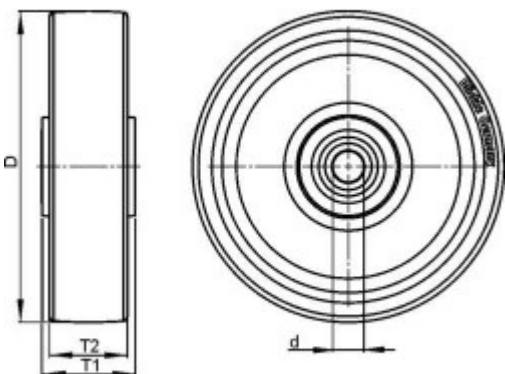

Technical data

单件重量	0.581 kg
轮毂长度 (T1)	60 mm
轴孔直径 (d)	20 mm
承载能力	400.00 kg
轮宽 (T2)	50 mm
轮径 (D)	125 mm
最低耐温性	-25° C - +80° C ° C
最高耐温性	80° C
胎面及轮胎硬度	70 Shore D
轴承种类	滚珠轴承
制造商	Blickle

滚动阻力	■ ■ ■ ■ ■
行走噪音	■ ■ ■ ■ ■
保护地面	■ ■ ■ ■ ■

变量



导电型, 无痕
- (ELS)



轴承
- XK



轮心油嘴
- NI